
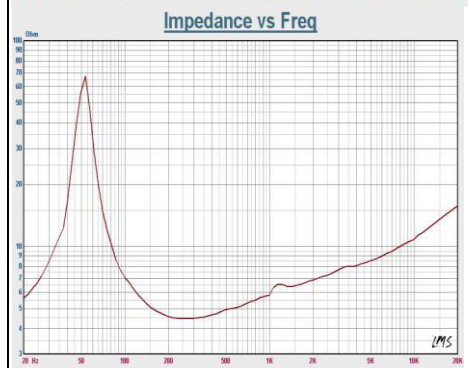


Speaker Model:ST650C-WF

IAPHRAGM	MTL:	Rubber+Paper
NOMINAL	IMPEDANCE:	4.0±15Ω
DCR	IMPEDANCE:	3.6±10Ω
SENSITIVITY	1W/1M:	88.0±3 dB
FREQUENCY	RESPONSE:	46-10K Hz
FREE AIR	RESONANCE:	46±20% Hz
VOICE COIL	DIAMETER:	30.5 mm
RATED POWER	INPUT:	40 W
MAXIMUM POWER	INPUT:	80 W
MAGNET	WEIGHT(OZ):	Ferrite
FERRO FLUID	ENHANCED:	NO
	Qms:	11.
	Qes:	504
	Qts:	47
	BL:	8.

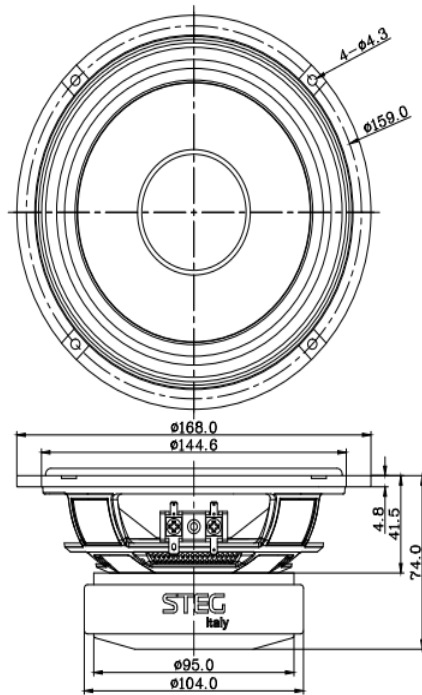

Speaker Model:ST650C-TW

IAPHRAGM	MTL:	SILK
NOMINAL	IMPEDANCE:	6.0±15Ω
DCR	IMPEDANCE:	6.0±10Ω
SENSITIVITY	1W/1M:	90.0±3 dB
FREQUENCY	RESPONSE:	1400-20K Hz
FREE AIR	RESONANCE:	1400±20% Hz
VOICE COIL	DIAMETER:	25.5 mm
RATED POWER	INPUT:	20 W
MAXIMUM POWER	INPUT:	40 W
MAGNET	WEIGHT(OZ):	NEO
FERRO FLUID	ENHANCED:	YES

